


# SANIFOS® 610

A dual motor lifting station that can be used for pumping residential to commercial wastewater when the sewer is at too high a level for natural gravity drainage.

Designed for drainage of single dwellings with multiple storeys.

Contains two separate load balanced pumps with high performance pumping systems that will operate alternately for a failsafe system.

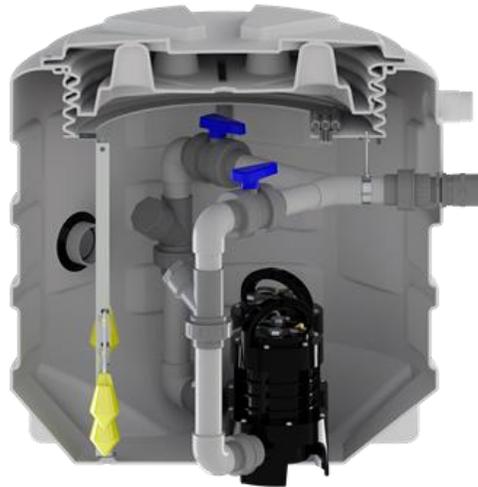

## TECHNICAL CHARACTERISTICS

Discharge	50 mm
Motor	2 x 1500 Watts / 2 x 6A
Voltage	220-240 V / 50 Hz
Working Water Temperature	35° C Max 70°C (intermittent)
Tank Volume	612 L
Product Weight	88kg's
Overall Measurements	1140 x 1000 mm
Inlet Pipe Work	6 x 40-110 mm
IP Rating	IP68
Maximum flow rate	26 m <sup>3</sup> /hr
Max discharge height	14 m (Q=0 L/min)

## SANIPUMP®

Inside

Vortex Impeller



Float switch

### APPLICATION



TOILET



HAND BASIN



SHOWER




BATH



WASHING MACHINE




DISHWASHER



KITCHEN SINK

## SANIFOS® 610

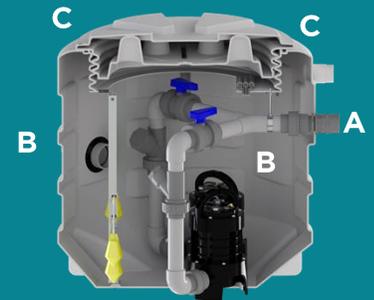

**A: 50 mm Discharge**

**B: 6 x 40-110 mm Inlets**

**C: 2 x 75mm Open Vent**

Product Reference: FOS610

# Saniflo

**SFA** SOUTH AFRICA

Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.

# SANIFOS<sup>®</sup> 610

EQUIPPED WITH


Vortex Impeller



HF Alarm




Smart Control Box

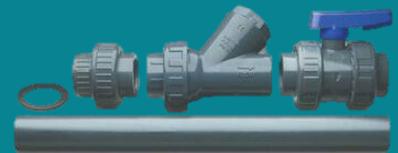


Ball non return valve and shut off valve

ACCESSORIES (sold separately)

Shut-off valve used on the inlets for ease of maintenance

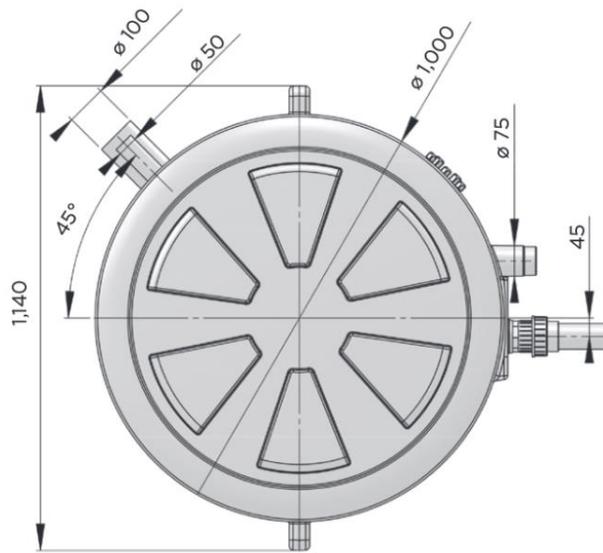

Note: Isolation valves should be fitted to the inlet pipework and discharge pipework to isolate the unit for servicing.

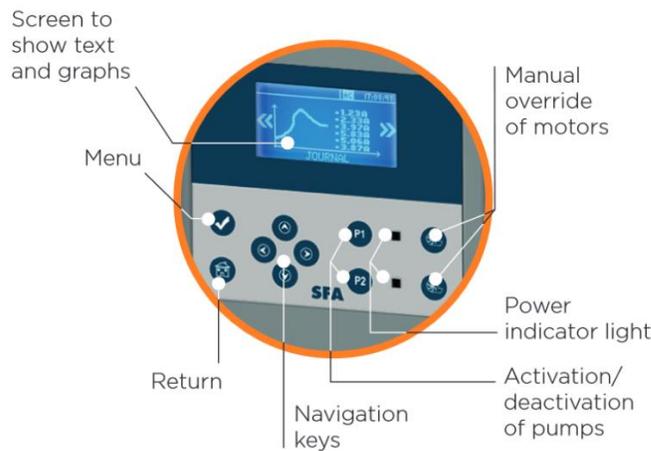

## WHY CHOOSE THIS PRODUCT


Tough, reliable macerating lifting station

Perfect for outdoor installation below ground

612 L tank

Autonomous operation

Max operating temperature 70°C (intermittent)

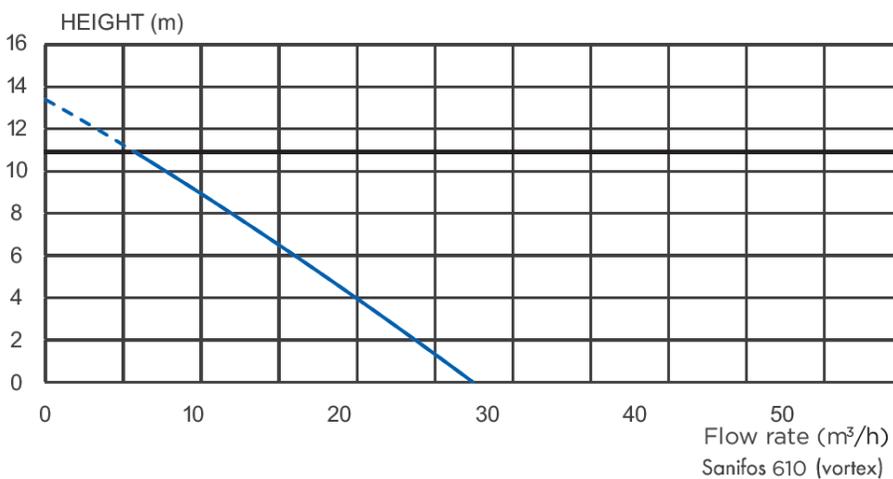

# Saniflo

**SFA** SOUTH AFRICA  
Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.