

SANIPUMP®

A submersible sump pump with grinder blade for use in domestic or commercial situations. The ideal solution for wastewater and sewage from underground pits and tanks



**Stainless Steel
Grinder**



Float switch

TECHNICAL CHARACTERISTICS

Discharge	40 mm
Motor	1500 Watts / 6A
Voltage	220-240 V / 50 Hz
Working Water Temperature	35° C Max 70°C (intermittent)
Product Weight	13kg's
Overall Measurements	265 x 382 mm
IP Rating	IP68
Motor Cable Length	10m
Maximum flow rate	11 (m ³ /h)
Max discharge height	11 m


WHY CHOOSE THIS PRODUCT

Compact in design, easy to install and ready to use

Perfect to replace existing black wastewater pump

Autonomous operation

Max operating temperature 70°C (intermittent)

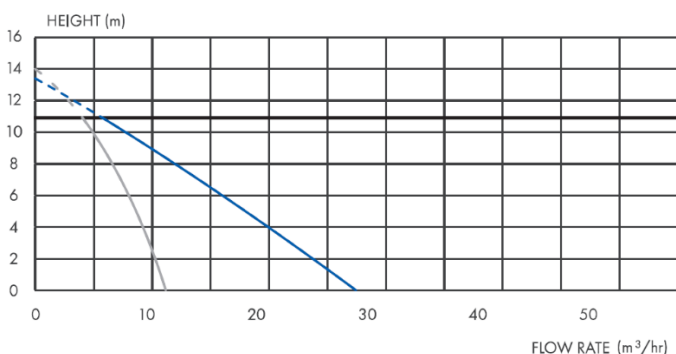

Sanipump (bladed) | Sanipump (vortex)

APPLICATION



TOILET



HAND BASIN



SHOWER



BATH



WASHING MACHINE



DISHWASHER



KITCHEN SINK

SANIPUMP®

EQUIPPED WITH

Stainless Steel! blade suitable for heavy usage



Product Reference: SANIPUMP

ACCESSORIES (sold separately)



Ball non return vale and shut off valve

Shut-off valve used on the inlets for ease of maintenance



Saniflo

SFA SOUTH AFRICA

Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.