

SANISUB[®] 400

Lifting height of 7.5 M
Integrated non-return valve
Automatic float release





TECHNICAL CHARACTERISTICS

Discharge	32 mm
Motor	400 Watts / 1.4A
Voltage	220-240 V / 50 Hz
Working Water Temperature	Max 40°C (intermittent)
Product Weight	4.1 kg's
Overall Measurements	183 x 254 mm
IP Rating	IP68
Motor Cable Length	10m
Q Max (m ³ /h)	6.5
Max Discharge Hight	7.5m

WHY CHOOSE THIS PRODUCT

- Portable compact in design, easy to use
- Submersible pump for clean grey or rainwater
- 7m immersion depth
- 32mm vertical pressure outlet with DN 25 hose connector
- Integrated non-return valve
- Envelope-cooled submersible pump for clear water
- Pump up to 10mm particle size

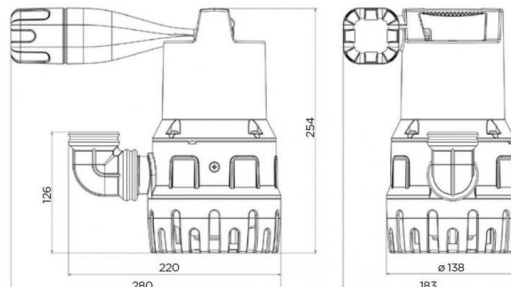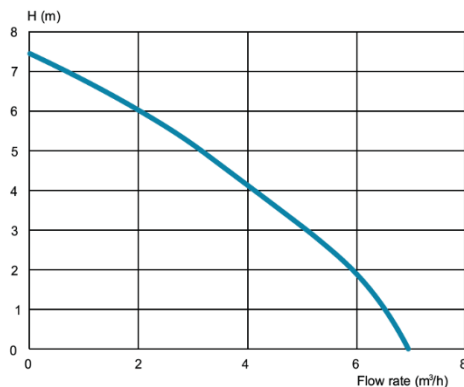

APPLICATION



Portable pump

FOR

Basement

Sumps

Flood water

Elevator shaft

SANISUB[®] 400



Product Reference: SUB400

Saniflo
SFA SOUTH AFRICA
Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.