

SANICUBIC[®] 1 GR

The SANICUBIC 1 GR is a lifting station ideal for small commercial premises or larger domestic houses.

It has 5 inlets to ensure it is possible to lift all wastewater even in the most demanding circumstances.


A lifting station with integrated cutter system, powered by a 2200W motor reaching up to a maximum discharge head of 22 metres (Q=0 l/min)



TECHNICAL CHARACTERISTICS

Discharge	63 mm
Motor	2200 Watts / 10.5 A
Voltage	220-240 V / 50 Hz
Working Water Temperature	35° C Max 55°C (intermittent)
Tank Volume	55 L
Product Weight	68kg's
Overall Measurements	564 x 540 x 607 mm
Inlet Pipe Work	50 / 110 mm
IP Rating	IP68
Maximum flow rate	200 L/min
Max discharge hight	22 m

Discharge height (m)

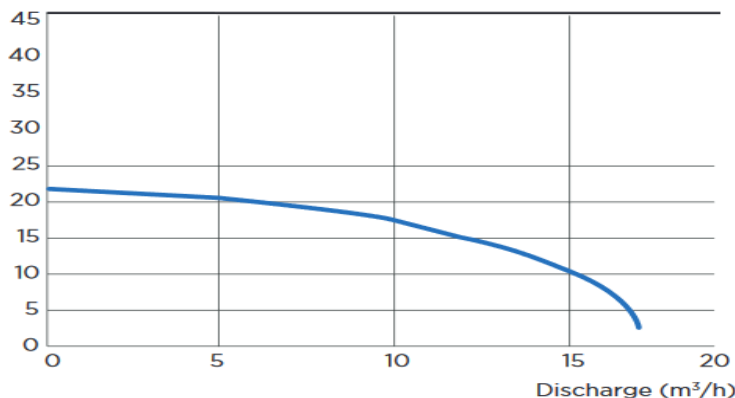

APPLICATION



TOILET



HAND BASIN



SHOWER



BATH



WASHING MACHINE




DISHWASHER



KITCHEN SINK

SANICUBIC[®] 1 GR

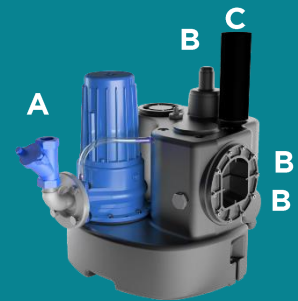

A: 63 mm Discharge

B: 50-110 mm Inlets

C: 75mm / Open Vent

Product Reference: SANICUBIC1GRSE71.1S



Saniflo

SFA SOUTH AFRICA



Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.

Non-return ball valve

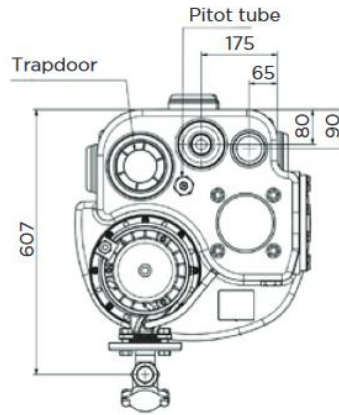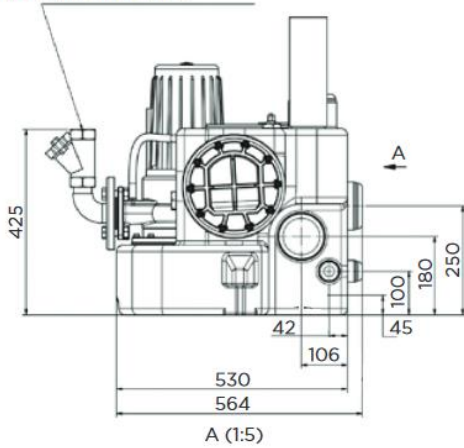

Flexible connection piece DN 65 for vent pipe

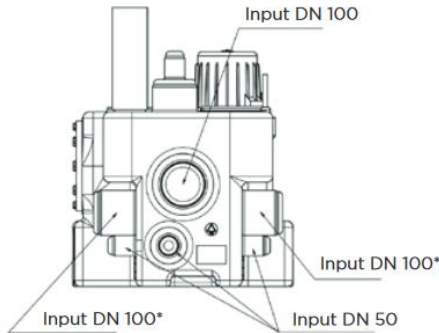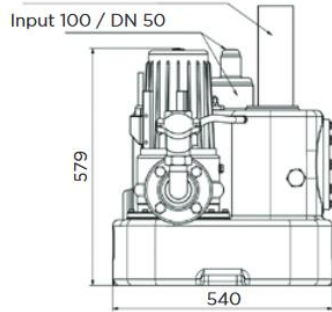

*This entrance must be directed at a height of 250 mm above the ground level directly after the lifting station.



Note: Isolation valves should be fitted to the inlet pipework and discharge pipework to isolate the unit for servicing.

WHY CHOOSE THIS PRODUCT


Tough, reliable grinding lifting station

Intelligent level controller

Clear LED screen

Allow 200 mm clearance around pump for maintenance purpose

Features integrated non-return valves

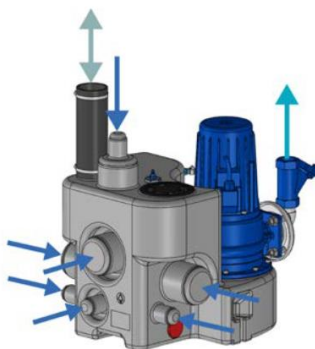

- Inlet diameter DN : 50, 100
- Discharge diameter DN : 50
- External ventilation diameter : 75 mm



Pro X K3 grinder

SANICUBIC[®] 1 GR

EQUIPPED WITH

External mounted control box with clear LED screen



Stainless Steel blade suitable for heavy usage



ACCESSORIES (sold separately)

Carbon filter - when you can't take the vent outdoors



Shut-off valve used on the inlets for ease of maintenance



Saniflo

SFA SOUTH AFRICA
Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber.